

Brick Slip Tracking System Fixing Detail



Recommended to apply weatherproof duct tape down the seam of adjoining sheets/panels

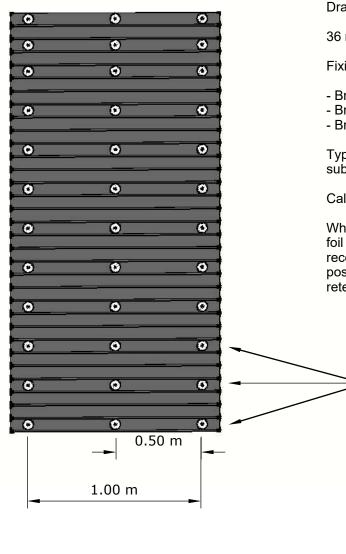

Drawing shows recommended fixing points for brick slip tracking system.

36 mechanical fixings recommended per 1.2m x 2.4m sheet/panel.

Fixing detail suitable for the following products:

- Brick Slip Tracking Sheets 1.2m x 2.4m
- Brick Slip Tracking Panels 1.2m x 2.4m with 17mm to 50mm XPS backing
- Brick Slip Tracking Panels 1.2m x 2.4m with 10mm Cement Board backing

Type of fixing dependant upon tracking sheet/panel option and the building substrate to which the tracking system is being applied.

Call 07825 304998 for technical advice fixing types.

When fixing tracking sheets without a backing panel, apply dots of foil pack adhesive at various points on the rear of the sheet within the recommended mechanical fixing points. This will hold the tracking sheet in position until the mechanical fixings are applied and provide additional retention to the tracking sheet.

Mechanical Screw Fixing Locations

| | | | REV | Description | | Date | Author | |
|---------------------------------|--|--------|-----------|------------------------|---|-----------|--------|-----|
| | | | | Revision History | | | | |
| | otes: | Drawn: | Date: | Title: Drawing Number: | | | er: | |
| Brick Bond Solutions Limited | Fixings type dependant upon building substrate. Contact 07825 304998 for technical advice. | PE | 12/3/19 | | | BBSL00021 | | |
| | | Scale: | Approved: | System Fixi | - | Sheet: | Of | Rev |
| | | | | Locations | | 1 | 1 | 1 |